

INDUSTRIAL PRODUCT DATASHEET

Seeed Studio XIAO nRF54L15

Seeed Studio XIAO nRF54L15: a production-ready, ultra-low-power wireless dev board for secure BLE 6.0, Matter, Thread, and Zigbee applications.

SKU	UPDATED	PRICE
101991421	2026-09-20 06:17:53	\$9.90(Excl. VAT)



Overview



The Seeed Studio XIAO nRF54L15 is a compact dev board built on Nordic's nRF54L15 SoC with a 128 MHz Arm Cortex-M33 core, dedicated RISC-V security coprocessor, and support for BLE 6.0, Matter, Thread, Zigbee, and proprietary 2.4 GHz protocols. It targets next-gen wearables, secure smart home hubs, industrial IoT sensors, and advanced prototyping with ultra-low power efficiency, comprehensive security features, and a production-ready SMD design.

Key Features

Note:

- XIAO nRF54L15 does **not support** the **Arduino**. The wiki provides **Nordic SDK** example projects.
- If you plan to use XIAO expansion boards, the models currently supported by XIAO nRF54L15 are: **Expansion Base, Grove Base, ePaper Breakout Board, L76K GNSS Module, 1-Channel Relay, ePaper Driver Board**.
- Other expansion boards are **hardware-compatible** only for now; software adaptation is required by developers.
- Official software support is **in progress** — **please be patient**.
- **Powerful SoC with Advanced Connectivity & Security**

XIAO nRF54L15 is built on Nordic's nRF54L15 SoC with a 128 MHz Arm Cortex-M33 core (1.5 MB NVM) and dedicated RISC-V security coprocessor. This dev board supports multiple wireless protocols including BLE 6.0, Matter, Thread, and Zigbee (IEEE 802.15.4-2020). It also features new 4 Mbps mode for proprietary 2.4 GHz protocols. And it's compatible with major ecosystems like Amazon Sidewalk, Apple Find My, and Google Find My Device through nRF Connect SDK. Comprehensive security features include secure boot, secure firmware updates, secure storage, TrustZone-enabled trusted execution environment, cryptographic acceleration with side-channel protection, and tamper detection, ensuring robust protection for IoT deployments.

- **Ultra-Low Power Efficiency**

XIAO nRF54L15 is optimized for long-life battery-powered applications, leveraging the Nordic nRF54L15 SoC's industry-leading efficiency (**0.6uA in the chip's System OFF mode**) and an integrated battery charging circuit. **Final board-level power consumption data is currently being verified for accuracy and will be announced soon.**

- **Streamlined Development Experience**

Full support for Nordic nRF Connect SDK and PlatformIO (Zephyr) enables efficient embedded development workflows. (Note: Arduino IDE is not currently supported)




- **Production-Ready Design with PCBA Support**

XIAO nRF54L15 features a production-optimized SMD (Surface Mount Device) design with standardized stamp holes, making it perfect for commercial PCBA (Printed Circuit Board Assembly) integration. With our [Seeed Studio Fusion](#) services, you can access competitive **one-stop PCBA manufacturing, component sourcing, and testing, plus free DFA/DFM review** to reduce manufacturing risks and accelerate the journey from prototype to production.

Note:

XIAO SoM User Manual open-sources all hardware and software materials of XIAO, providing professional product design guidelines to help you accelerate ideas off the ground, streamline product design, providing a seamless experience from module selection to mass production. You can check [here](#) more info.

Product Gallery



Specification



Product Name	Seeed Studio XIAO nRF54L15		Seeed Studio XIAO nRF54L15 Sense	XIAO nRF52840 - Tiny Arduino Board Supports Bluetooth 5.0

Onboard	1x User LED (1 Color)		1x User LED (3 Colors)
	1x Charge LED (Battery Charging Indicator)		1x Charge LED (Battery Charging Indicator)
	1x Reset Button		1x BlueTooth Antenna
	1x User Button		1x Reset Button
	1x Onboard Ceramic Antenna		1x Onboard Ceramic Antenna
	1x IPEX4 Connector (for external antenna)		/
	/	1x 6-Axis IMU	/
		1x PDM Microphone	
Wireless Connectivity	Bluetooth LE 6.0 (include Channel Sounding)		Bluetooth LE 5.2
	Bluetooth Mesh		Bluetooth Mesh
	NFC		NFC
	Thread		Thread
	Zigbee		Zigbee
	Matter		Matter
	Amazon Sidewalk		Proprietary 2.4 GHz protocols
	Proprietary 2.4 GHz protocols		/
Power Input	Type-C: 5V		
	Battery: 3.7V		
Low Power Mode	The test results will be finalized soon. Please stay tuned.		5uA
Software Compatibility	Nordic nRF Connect SDK		Arduino IDE
	PlatformIO		PlatformIO
	Zephyr RTOS		MicroPython
	/		CircuitPython
	/		Zephyr RTOS
Working Temperature	-20°C to 70°C		-40 to 85°C
Dimensions	21 x 17.8mm		

1 x 6-Axis IMU
1 x PDM Microphone

Varients	Seeed Studio XIAO nRF54L15 Tiny BLE dev board with ultra-low power The 3PCS Pack will be available soon. Stay tuned.	Seeed Studio XIAO nRF54L15 Sense Compact motion and sound sensing in one BLE board The 3PCS Pack will be available soon. Stay tuned.	Seeed Studio XIAO nRF52840 (Pre-Soldered) Seeed Studio XIAO nRF52840 (3PCS)	S e e d S t u d i o X I A O n R F 5 2 8 4 0 (P r e - S o l d e r e d) S e e d S t u d i o X I A O n R F 5 2 8 4 0 (3 P C S)
----------	---	---	--	--

Hardware Overview

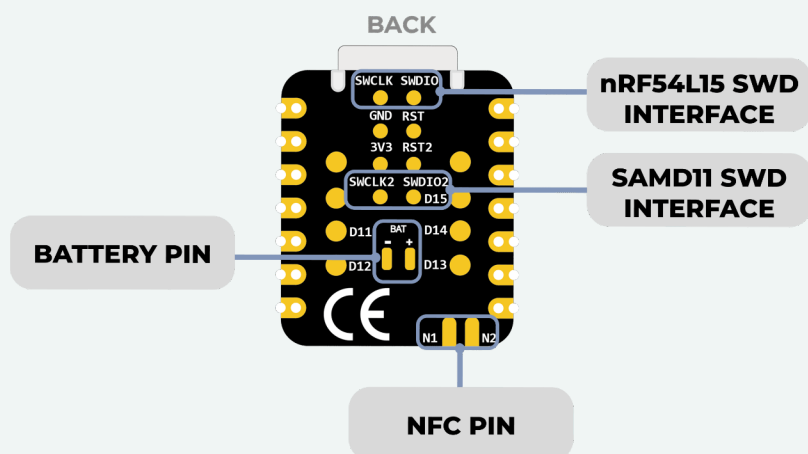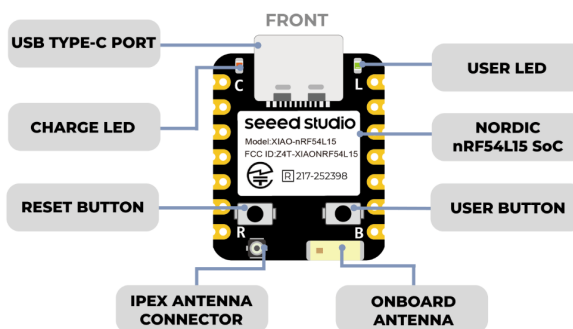



- _____

Seeed Studio XIAO nRF54L15	X1
7-Pin Header (2.54mm)	X2

Compliance & Logistics



HSCODE	8543709990
USHSCODE	8517180050
UPC	
EUHSCODE	8543709099
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- <https://www.seeedstudio.com/XIAO-nRF54L15-p-6493.html>
- [Wiki-XIAO nRF54L15 Series Resources](#)
- [Seeed Studio XIAO Use Case](#)

Seeed Technology Co.,Ltd.

9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676

Web: www.seeed.cc

Shop: www.seeedstudio.com