
seeed studio

INDUSTRIAL PRODUCT DATASHEET


Seeed Studio XIAO MG24

Compact Matter-native Seeed Studio XIAO MG24 board with EFR32MG24 SoC, Thread/BLE 5.3, low power, and production-ready design for smart home automation, remote sensing and control, and environmental monitoring.

SKU	UPDATED	PRICE
102010590	2026-09-20 06:25:57	$7.90(Excl. VAT)

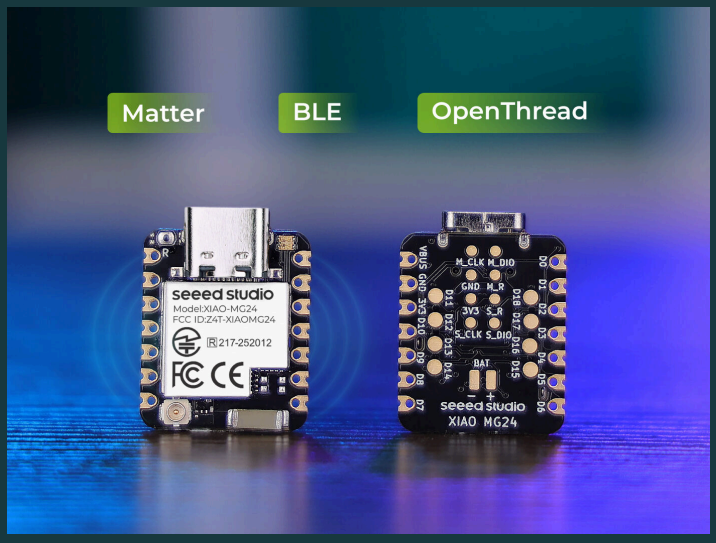

Overview

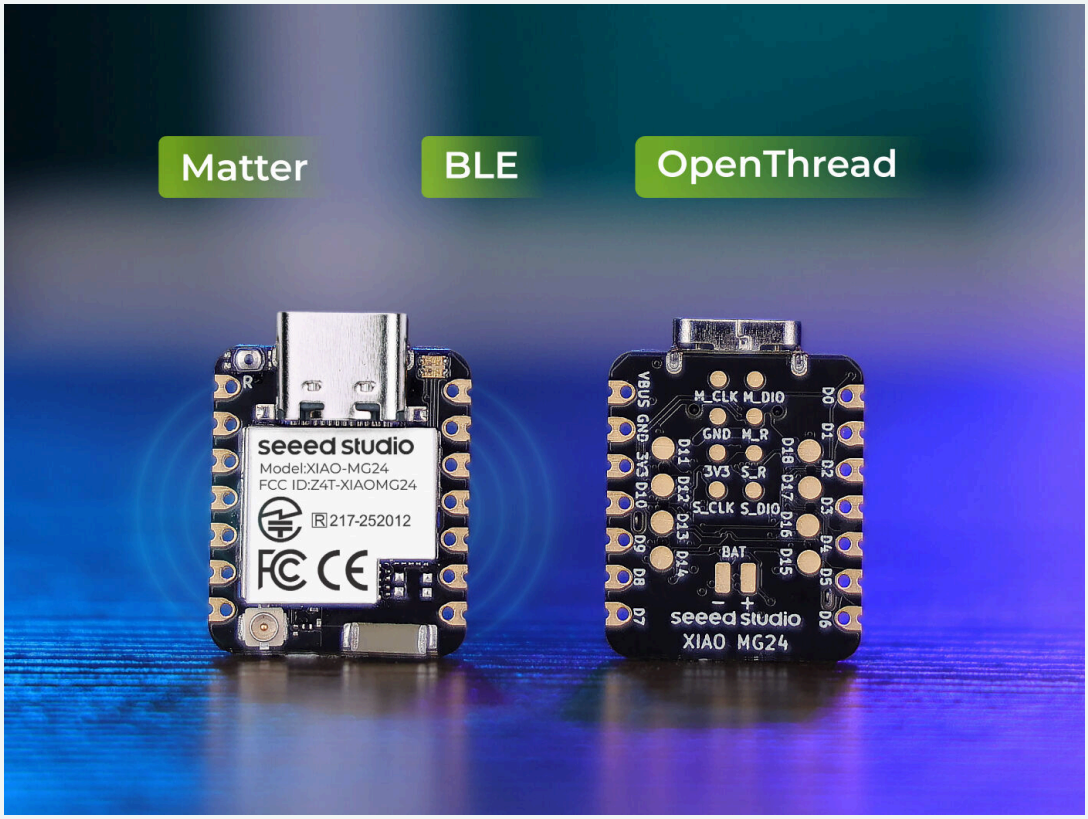

The Seeed Studio XIAO MG24 is the 11th member of the Seeed Studio XIAO family, featuring the Silicon Labs EFR32MG24 SoC with a 32-bit 78 MHz ARM Cortex-M33 with DSP instruction, and is Matter Native with support for Matter over Thread and Bluetooth Low Energy 5.3, supported by the Arduino Core. It offers super-low power consumption less than 1.95μA in sleep mode, 4MB on-board Flash, battery charging circuit, 19 GPIOs, Secure Vault encrypted on-chip hardware, on-board antenna with BLE range up to 50m and external UFL interface, classic thumb-size 21 x 17.8mm single-sided mount design, and native compatibility with all XIAO accessory add-ons and kits as well as Seeed Studio Fusion PCBA services for commercial integration.

Key Features

- **High Performance MCU:** Silicon Labs' EFR32MG24 SoC, 32-bit 78 MHz ARM Cortex®-M33 with DSP instruction
- **Matter Native:** Compatible with Matter® over Thread® and Bluetooth® Low Energy 5.3, Supported by the Arduino® Core
- **Outstanding RF Performance:** Equipped with an on-board antenna with BLE range up to 50m in an open location with no signal interference, while reserving an interface for external UFL antenna
- **Super-Low Power Design:** Power consumption less than 1.95μA in sleep mode, ideal for battery-powered projects
- **Rich On-Board Resources:** Additional 4MB Flash on board, on-board battery charging circuit, 19 GPIOs, LED
- **Security Encrypted On-Chip:** A dedicated hardware secure engine containing its own CPU enables the Secure Vault functions.
- **Classic XIAO Design:** Remains the classic XIAO design of the thumb-size form factor of 21 x 17.8mm, and single-sided mount, making it perfect for space-limited projects such as wearables
- **XIAO Accessory Add-ons and Kits Compatibility**: Natively compatible with all the XIAO accessory add-ons and kits of Grove Expansion, CAN-Bus, LED Matrix, Vision AI Sensor, Round Display, GSP Module, 2-Mic Array, ePaper Display, mmWave sensor, LoRa Module and many more.

Production-Ready Design with Fusion PCBA Support

Being the 11th member of the **Seeed Studio XIAO family**, the XIAO MG24 remains the classic XIAO design (thumb-size, SMD, stamp holes). All these features make it a perfect fit for commercial PCBA (Printed Circuit Board Assembly) integration.

With our Seeed Studio Fusion services, you can access competitive **one-stop PCBA manufacturing, component sourcing, and testing, plus free DFA/DFM review** to reduce manufacturing risks and accelerate the journey from prototype to production.

Note

XIAO SoM User Manual open-sources all hardware and software materials of XIAO, providing professional product design guidelines to help you accelerate ideas off the ground, streamline product design, providing a seamless experience from module selection to mass production. You can check **here** to see more info.


Product Gallery











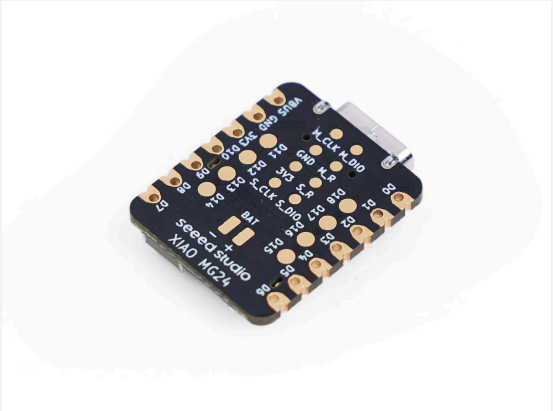

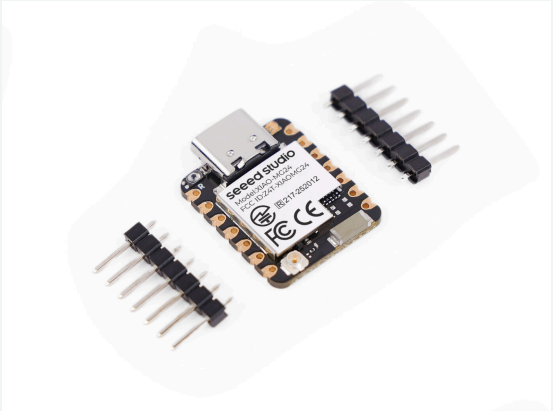


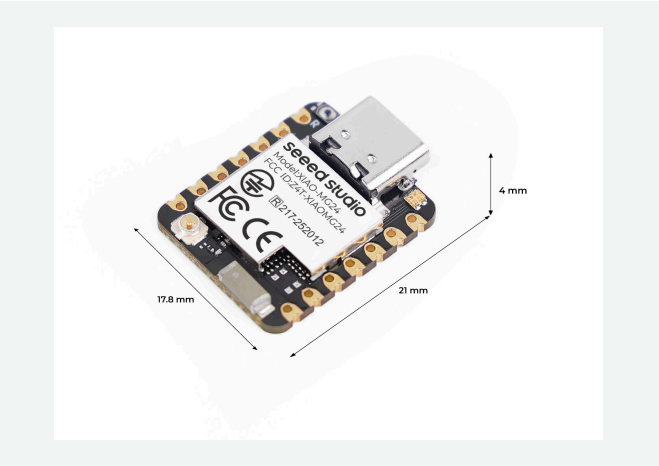


Specification

Product	XIAO MG24	XIAO MG24 Sense
Processor	Silicon Labs EFR32MG24	
	ARM Cortex-M33 @ 78MHz	
RAM	256kB	
Flash	1536KB + 4MB Onboard	
LEDs	1x User LED 1x Power LED	
Sensors	-	1x Onboard Analog Microphone 1x Onboard 6-Axis IMU
Interface	22 Pins(All PWM): 19x Analog 19x Digital 1x I²C 2x UART 2x SPI	22 Pins(All PWM): 19x Analog 19x Digital 1 X I²C 2 X UART 2x SPI
Button	1x RESET Button	
Security	Hardware Cryptographic Acceleration, True Random Number Generator, ARM® TrustZone®, Secure Boot, Secure Debug Unlock etc.	
Low power（Typ.）	1.95μA	
Normal（Typ.）	6.71mA	
Sleep（Typ.）	1.91mA	
Software Compatibility	Arduino IDE	
Supported Antenna	MAX 2.4GHz Ceramic Antenna: 4.97dBi	
Working Temperature	-20°C-70°C	
Dimensions	21x17.8 mm	

Hardware Overview

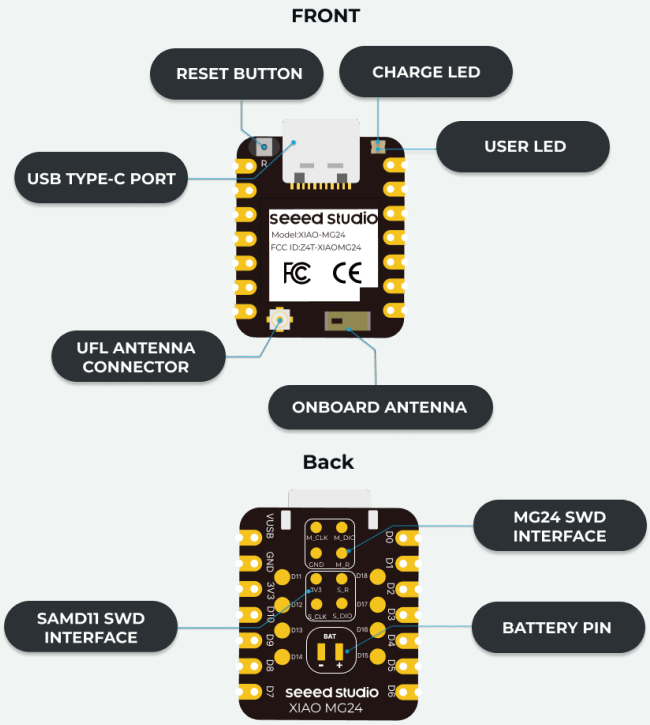

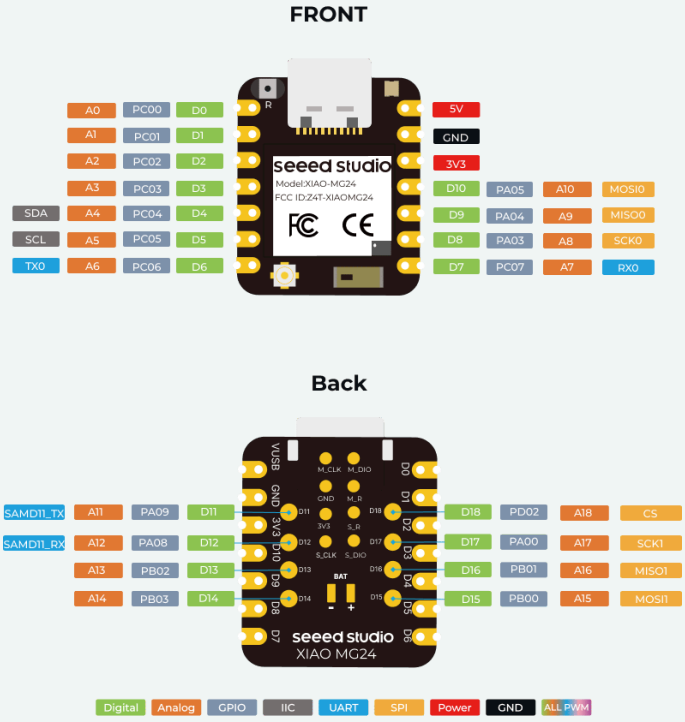

Applications

- **Smart Home Automation:** Devices like smart lighting, thermostats, and security systems using Matter.
- **Remote Sensing and Control:** Wireless control of devices in automation systems.
- **Environmental Monitoring:** Battery-powered sensors for indoor settings.

Part List

Seeed Studio XIAO MG24	x1
7 Pin Header	x2

Compliance & Logistics

HSCODE	8543709990
USHSCODE	8517180050
UPC	
EUHSCODE	8543709099
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- https://www.seeedstudio.com/Seeed-Studio-XIAO-MG24-p-6247.html
- PCN-XIAO Series Packaging Upgrade.pdf
- Wiki-XIAO MG24 Series Resources
- Seeed Studio XIAO Use Case

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com