
seeed studio

INDUSTRIAL PRODUCT DATASHEET


86Duino Zero - an embedded platform based on Vortex86EX SoC

86Duino Zero combines high-performance x86 processing with Arduino compatibility in an open-source embedded platform.

SKU	UPDATED	PRICE
102990063	2024-08-09 02:07:27	$45.00(Excl. VAT)

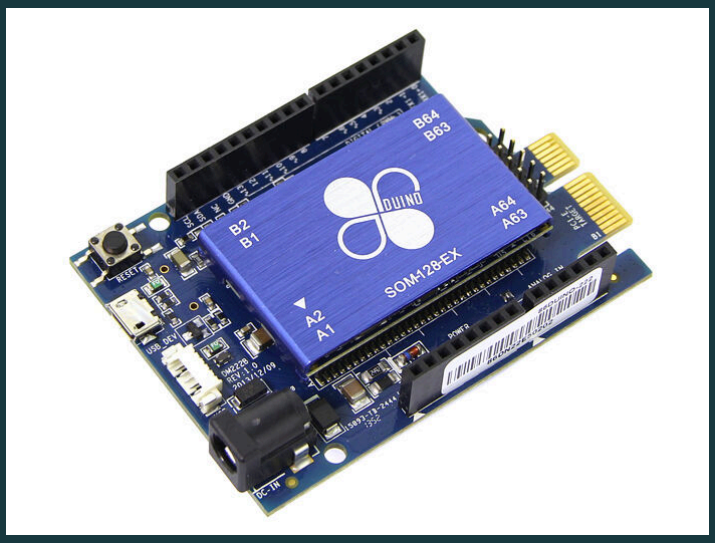

Overview

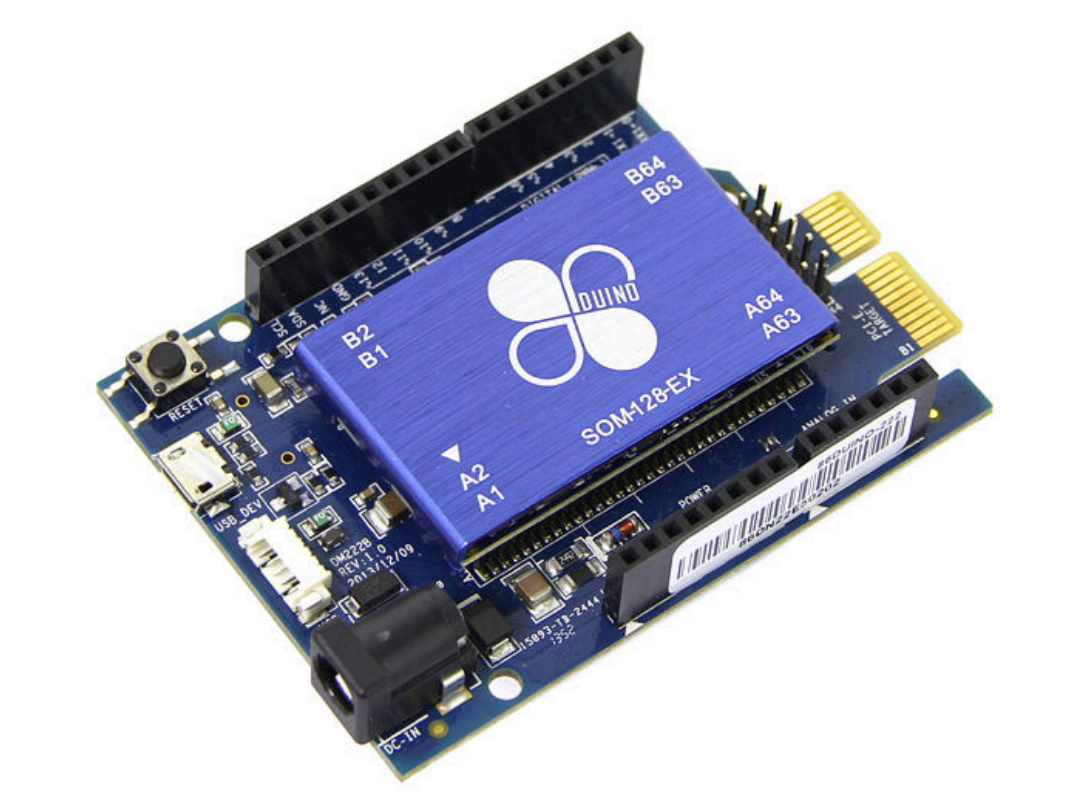

The 86Duino Zero is an Arduino-compatible embedded platform powered by the Vortex86EX SoC, featuring a 300 MHz 32-bit x86 processor with 128 MB DDR3 memory. It supports multiple operating systems including Windows and Linux, and offers a wide range of I/O and connectivity options in an Arduino Leonardo form factor.

Key Features

86Duino is an open-source embedded platform based on Vortex86EX SoC, easy-to-use hardware and software integrated. This Arduino-compatible board can support many x86 O/S as well as those running on the original Arduino base system.

The 86Duino is a high performance and fully static 32-bit x86 processor board compatible with Windows OS, Linux and most popular 32-bit RTOS. It integrates PCIE bus, DDR3, ROM controller, xISA, I2C, SPI, IPC (Internal Peripheral Controllers with DMA and interrupt timer/counter included), Fast Ethernet, FIFO UART, USB2.0 and SD/SATA controller within a single package to form a system-on-a-chip (SOC).

86Duino provides an ideal solution for the Arduino and embedded system with desired performance.

Features

- Vortex86EX Processor

- 300MHz 32-bit x86

- 128MB DDR3

- LAN

- USB 2.0

- Micro-SD

- Open-Source Hardware
- Support DOS, Windows, Linux
- Arduino-Compatible IDE
- Arduino “Leonardo” form factor

Specifications


- Processor: Vortex86EX
- Clock Speed: 300 MHz
- Memory: 128MB DDR3
- Flash Memory: 8MB
- Digital I/O Pins: 14 (of which 7 provide 32bit PWM output)
- Analog Input Pins: 6 (11bit)
- Operating Voltage: 5V
- Input Voltage (recommended): 7-12V
- DC Current per I/O Pin: 16 mA
- DC Current for 3.3V Pin: 400 mA


Documentations


- Vortex86EX Datasheet V1.4


- Circuits Schematics for DM-205 (Vortex86EX SOM-128-EX)
- Circuits Schematics for DM-222 (Daughter Board)
- BOM/Part List for DM-222 (Daughter Board)
- Gerber file for DM-222 (Daughter Board)


Product Gallery

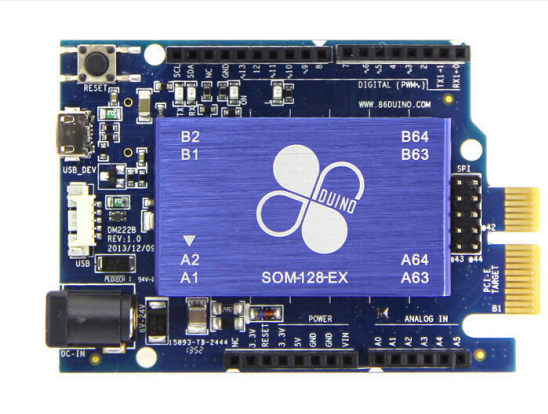

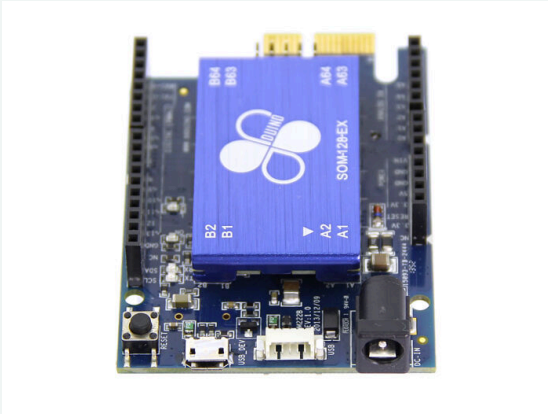

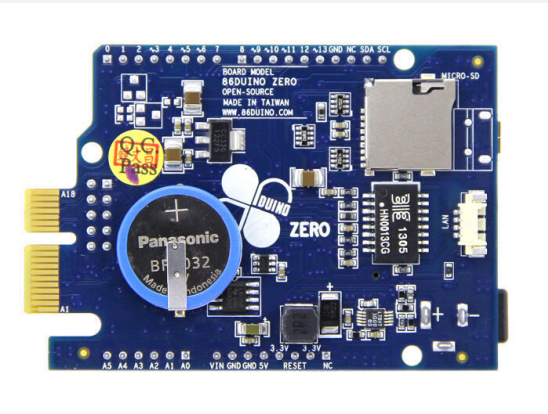

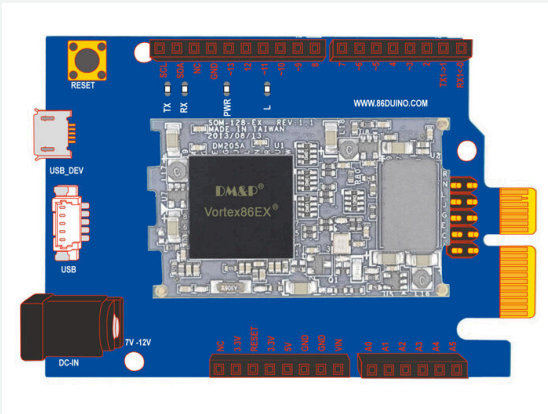

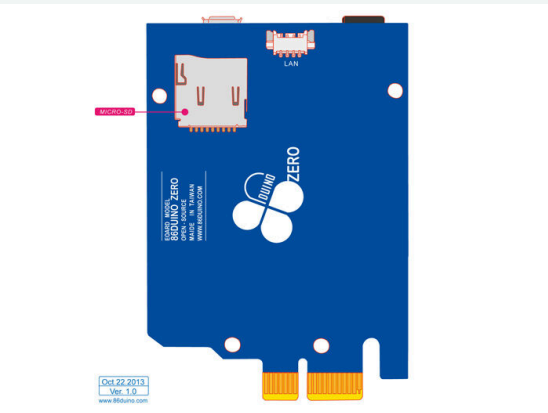

Resource Links

- https://www.seeedstudio.com/86Duino-Zero-an-embedded-platform-based-on-Vortex86EX-SoC-p-1847.html

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com